



Find the Right Bullhorn for Your Rectifiers

SATELLITE

CELLULAR

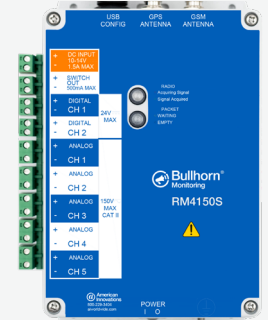

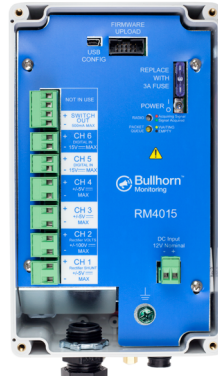



Click for Detailed Specifications:

RM4014S

RM4015

RM4016

RM4150S

	RM4014S	RM4015	RM4016	RM4150S
Application	Rectifier	Rectifier	Rectifier	Rectifier
Analog Channels	4	4	4	5
Digital Channels	2	2	2	2
Typical Measurements	<ul style="list-style-type: none"> ✓ Rectifier Volts ✓ Rectifier Amps ✓ Pipe-to-Soil 	<ul style="list-style-type: none"> ✓ Rectifier Volts ✓ Rectifier Amps ✓ Pipe-to-Soil 	<ul style="list-style-type: none"> ✓ Rectifier Volts ✓ Rectifier Amps ✓ Pipe-to-Soil 	<ul style="list-style-type: none"> ✓ Rectifier Volts ✓ Rectifier Amps ✓ Pipe-to-Soil ✓ Instant Off
Interruption	Yes	Yes	No	Yes
Communication	Two-Way	Two-Way	One-Way	Two-Way
Mounting	External	Internal	External	Internal
Surge Immunity	Hardened	Requires Surge Kit	Requires Surge Kit	Hardened
Surge Rating	30kV	8kV	8kV	30kV
Power Source	Line	Line	Solar	Line
Backup Power	Battery	Battery	Battery	Battery
Warranty	3 Year All Inclusive	Standard	Standard	3 Year All Inclusive
Download Datasheet				

INPUTS

4 Analog Channels	4 analog + 2 digital channels
Channel 1, 3, 4 DC Voltage Range:	+/- 5 V
Channel 2, AC Voltage Range	+/- 100 V
Scan Rate	16 scans per second
Channel-to-channel isolation	≥ 250 V DC
Surge	Survives multiple 30KV strikes. Tested using 50uS waveform to simulate lightning strike.
Accuracy	2% of reading

2 DIGITAL CHANNELS

Functions	Digital input, accumulator, accumulator reset, or contact closure (0 - 15 V DC)
Logic Levels	minimum Logic 1 = 2 V; maximum Logic 0 = 800 mV
Scan Rate	16 scans per second
Accumulator maximum cycle rate:	1 cycle/2 s
Minimum state change period:	1 s
Minimum pulse width:	250 ms

INTERRUPTION OPTIONS

Maximum current:	500 mA DC
Output voltage:	10-14 V DC
Min. switching cycle:	No or NC, Solid State or Mechanical
On/off cycle increments:	100 ms
Interruption modes:	Daily, interference, start/stop, and continuous
Interference mode:	Set up to 99 rectifiers or groups for influence studies
Relay types:	NO or NC, solid state or mechanical

SOFTWARE INTERFACE

Bullhorn Web

Bullhorn Tools for PC

COMMUNICATIONS

Satellite: Orbcomm - IsatData Pro

Poll, reconfigure, and set alarm thresholds over-the-air

POWER SUPPLY

AC:	100 - 240 V AC with included AC/DC converter
DC:	10-14 V DC with interruption; 5-25 V DC without interruption
Backup:	Internal sealed rechargeable battery

DIMENSIONS

RM4014s	NEMA 4X compliant enclosure (7.5" x 5.25" x 12.25")
----------------	---

DATA INTEGRITY

Memory	EEPROM
---------------	--------

ENVIRONMENTAL SPECS

Temperature	-30° C to +70° C
Humidity	0 - 100% non-condensing

SAFETY AND COMPLIANCE

Tested Safety Standards	EN61010-1:2010 EN61010-2-030:2010 CAN/CSA C22.2 No. 61010-1-2012 CAN/CSA C22.2 No. 61010-2-030:2010 UL61010-1:2012 supplemented by UL61010-2-030:2012
--------------------------------	--

06022022

INPUTS

4 Analog Channels

Channel 1, 3, 4 DC Voltage Range:	+/- 5 V
Channel 2, AC Voltage Range	+/- 100 V
Scan Rate	16 scans per second
Channel-to-channel isolation	≥ 250 V DC
Accuracy	2% of reading

2 DIGITAL CHANNELS

Functions	Digital input, accumulator, accumulator reset, or contact closure (0 - 15 V DC)
Logic Levels	minimum Logic 1 = 2 V; maximum Logic 0 = 800 mV
Scan Rate	16 scans per second
Accumulator maximum cycle rate:	1 cycle/2 s
Minimum state change period:	1 s
Minimum pulse width:	250 ms

INTERRUPTION OPTIONS

Maximum current:	500 mA DC
Output voltage:	10-14 V DC
Min. switching cycle:	1s
On/off cycle increments:	100 ms
Interruption modes:	Daily, interference, start/stop, and continuous
Interference mode:	Set up to 99 rectifiers or groups for influence studies
Relay types:	NO or NC, solid state or mechanical

SOFTWARE INTERFACE

Bullhorn Web

Bullhorn Tools for PC

COMMUNICATIONS

Orbcomm: IsatData Pro

Poll, reconfigure, and set alarm thresholds over-the-air

POWER SUPPLY

AC:	100 - 240 V AC with included AC/DC converter
DC:	10-14 V DC with interruption; 5-25 V DC without interruption
Backup:	Internal sealed rechargeable battery

DIMENSIONS

RM4015	Polycarbonate enclosure 4.75" x 3" x 8"
--------	--

DATA INTEGRITY

Memory	EEPROM
--------	--------

ENVIRONMENTAL SPECS

Temperature	-30° C to +70° C
Humidity	0 - 100% non-condensing

SAFETY AND COMPLIANCE

Certification Mark:	TUV
Tested Safety Standards	EN61010-1:2010 EN61010-2-030:2010 CAN/CSA C22.2 No. 61010-1-2012 CAN/CSA C22.2 No. 61010-2-030:2010 UL61010-1:2012 supplemented by UL61010-2-030:2012
Emissions:	FCC Part 15
Surge	8kV Air / 4kV Contact

06022022

INPUTS

4 Analog Channels

Channel 1, 3, 4 DC Voltage Range: +/- 5 V

Channel 2, DC Voltage Range +/- 100 V

Scan Rate 16 scans per second

Channel-to-channel isolation \geq 250 V DC

Accuracy 2% of reading

2 DIGITAL CHANNELS

Functions Digital input, accumulator, accumulator reset, or contact closure (0 - 15 V DC)

Logic Levels Minimum logic 1 = 2 V;
Maximum logic 0 = 800 mV

Scan Rate 1 scan per second

Minimum pulse width: 250 ms

SOFTWARE INTERFACE

Bullhorn Web

Bullhorn Tools for PC

COMMUNICATIONS

Orbcomm: IsatData Pro

POWER SUPPLY

Solar: 3.4 Amp-Hr sealed lead acid battery with 1.6 W solar panel

DIMENSIONS

RM4016 Weatherproof enclosure
8.5" x 6.5" x 4.5"

DATA INTEGRITY

Memory EEPROM

ENVIRONMENTAL SPECS

Temperature -30° C to +70° C

Humidity 0 - 95% non-condensing

SAFETY AND COMPLIANCE

Emissions: FCC Part 15

Surge 8kV Air / 4kV Contact

08222022

INPUTS

5 Analog Channels

DC Voltage Range:	±150 V with accuracy of 1% of reading
AC Voltage Range	150 V with accuracy of 1% of reading
Input Impedance	10 MΩ
Scan Rate	Once every 30 seconds
Channel-to-channel isolation	≥ 250 V DC

Surge	Survives multiple 30KV strikes. Tested using 50uS waveform to simulate lightning strike.
--------------	---

2 DIGITAL CHANNELS

Functions	Digital input, accumulator, accumulator reset, or contact closure (0 - 24 V DC)
------------------	---

Minimum Logic	1 = 2 V
Maximum Logic	0 = 1 V
Scan Rate	20 scans per second
Minimum pulse width:	250 ms

INTERRUPTION

Switch Out Channel	
Maximum current:	500 mA DC
Output voltage:	10-14 V DC
Minimum switching cycle:	1s
On/off cycle increments:	100 ms
Interruption modes:	Daily, interference, start/stop, continuous, and Instant Off
Interference mode:	Set up to 99 rectifiers or groups for influence studies
Relay types:	NO or NC, solid state or mechanical

INSTANT OFF

Analog channel 3:	± 10 V DC, sampled 60 times per sec
IR drop edge delay:	0 to 60 seconds in increments of 1 ms
Configuration	GPS-synchronized measurement using configurable on, off, and delay settings

COMMUNICATIONS

GSM cellular:	Worldwide compatibility on LTE cellular networks
USA:	Carrier independent. Automatically selects the best signal.

Poll, reconfigure, and set alarm thresholds over-the-air

SOFTWARE INTERFACE

Bullhorn Web

Bullhorn Tools for PC

POWER SUPPLY

AC:	100 - 240 V AC with included AC/DC converter
DC:	10-14 V DC with interruption; 5-25 V DC without interruption
Backup:	Internal sealed rechargeable battery

DIMENSIONS

RM4150S	Polycarbonate enclosure (5" x 2.25" x 8")
External mount (optional):	Aluminum Enclosure
Part #: 517200-000	(7.3" x 4" x 12.4")

DATA INTEGRITY

Memory	EEPROM
---------------	--------

ENVIRONMENTAL SPECS

Temperature	-30° C to +70° C
Humidity	0 - 95% non-condensing

06022022